Thermal Receipt Printer

IP200S / 260S / 300S



- New Sleek Shell Design
- Wall Mount Capable
- Easy Drop - in Paper Loading
- Intelligent Cutter Control System
- Order Comes Remind
- Screen Can be Added (IP - 300S)
















IP - 200S/260M/300S

Thermal Receipt Printer



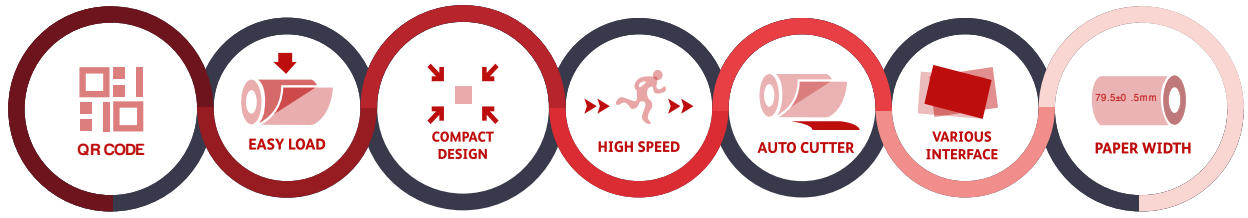

MODEL	IP - 200S	IP - 260S	IP - 300S
Printing method	direct thermal		
Printing speed	200mm/s	260mm/s	300mm/s
Paper width	79.5± 0.5mm		
Printable area	72mm (adjustable by commands)		
Maximum paper diameter	83mm		
Paper thickness	0.06 - 0.08mm		
Column capacity	576 dots/line 512 dots/line		
Line space	3.75mm (changeable by commands)		
Commands	compatible with ESC/POS		
Interface type	USB + serial / USB +Lan / USB + Bluetooth / USB + WIFI	USB + Serial + Lan	USB + Serial + Lan
Character size	ANK, Font A: 12 x 24 dots Font B: 9 x 17 dots simplified/traditional Chinese: 24x24 dots		
Dimension	18 x 140 x 134.1mm (DxWxH)		
Gross weight	0.97 kg		
Bar code	UPC-A /UPC-E / JA(EAN13) / JAN8 (EAN8) / CODE39 / ITF CODABAR / CODE93 / CODE 128		
2-dimension code	QR CODE / PDF417 (USB + Lan)		
Code page	PC347 (Standard Europe), Katakana, PC850 (Multilingual), PC860(Portuguese), PC8633 (Canadian - French), PC865 (Nordic), WestEuropeGreek, Hebrew, East Europe, Iran, Wpc1252, PC866(Cyrillic#2), PC852(Latin2), Pc858, IranII Latvian, Arabic, PT151(1251)		
Cutter	Partial		
Cutter life	1.5 million cuts		
Print head life	100km		
Input buffer	64kbtes		2048 Kbytes
NV Flash	256 kbytes		
Power adaptor	ac110v/220v, 50~60Hz		
Power source	DC 24V/2.5A		
Cash drawer output	DC 24 V/1A		
Work environment	Temperature: 0~45˚C, Humidity: 10~80RH%		
Storage environment	Temperature: 10~60˚C, Humidity: 10~90RH%		
Operating system	Win XP/Win Vista/Win 7/Win 8/Win 8.1/Win 10 / linux		

Windows 7 Windows 8 Windows 10 FC CE CB